



Cummins Inc.

Columbus, Indiana 47201

Engine Data Sheet

Basic Engine Model:
QSX15-G7

Engine Critical Parts List:
CPL: 8142

Curve Number:
FR-10440

Date:
14Jan05

**G-DRIVE
QSX
1**

Displacement : 15 liter (912 in³)

Bore : 137 mm (5.39 in.) Stroke : 169 mm (6.65 in.)

No. of Cylinders : 6

Aspiration : Turbocharged and Charge Air Cooled


Engine Speed RPM	Standby Power		Prime Power		Continuous Power	
	kWm	BHP	kWm	BHP	kWm	BHP
1800	511	685	463	620	325	435

Para información en español visita: www.plantaselectricasdemexico.com



email: ventas@plantaselectricasdemexico.com

Engine Performance Data @ 1800 RPM

OUTPUT POWER			FUEL CONSUMPTION			
%	kWm	BHP	kg/ kWm-h	lb/ BHP-h	liter/ hour	U.S. Gal/ hour
STANDBY POWER						
100	511	685	0.199	0.328	120	31.6
PRIME POWER						
100	463	620	0.198	0.326	108	28.5
75	347	465	0.207	0.341	84.5	22.3
50	231	310	0.224	0.368	60.8	16.1
25	116	156	0.260	0.427	35.5	9.4
CONTINUOUS POWER						
100	325	435	0.207	0.341	79.1	20.9

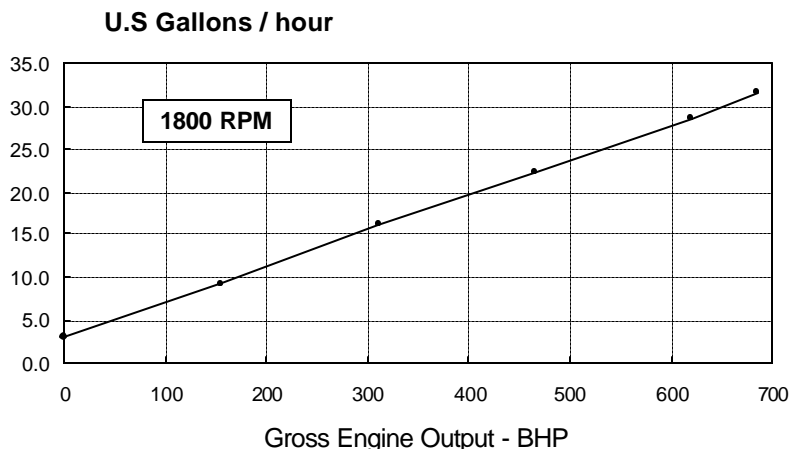

Power Derate Curves:

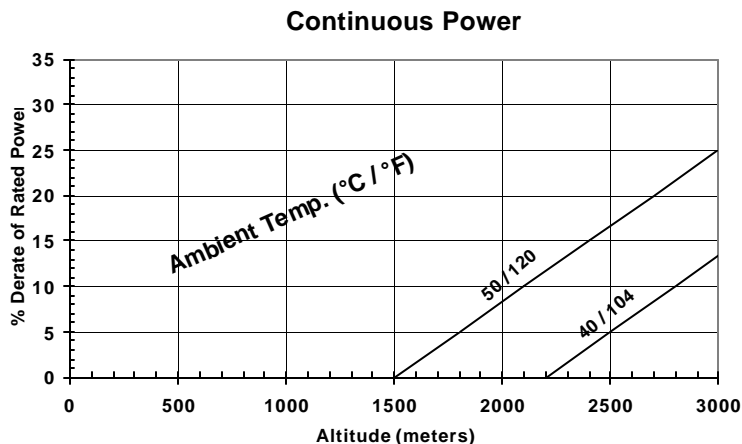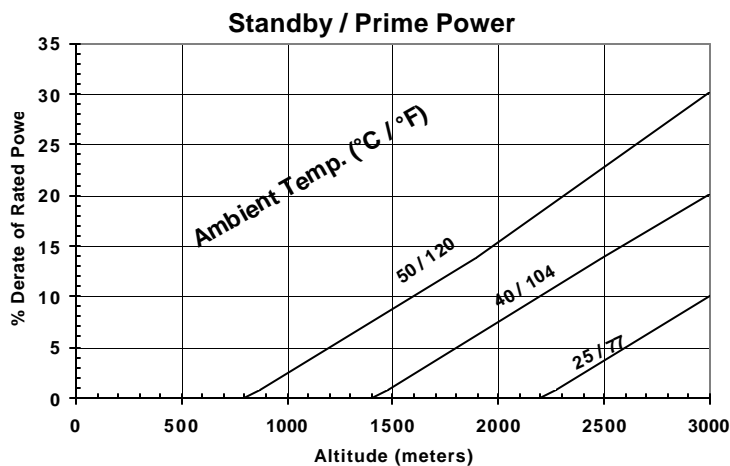

Operation At Elevated Temperature And Altitude:

For sustained operation above these conditions, derate by an additional 1.8% per 300 m (1000 ft), and 10% per 10° C (18° F).

CONVERSIONS:(Liters = U.S. Gal x 3.785) (U.S.Gal = Liters x 0.2642)

Data Subject to Change Without Notice

These guidelines have been formulated to ensure proper application of generator drive engines in A.C. generator set installations. **STANDBY POWER RATING:** Applicable for supplying emergency power for the duration of the utility power outage. No overload capability is available for this rating. Under no condition is an engine allowed to operate in parallel with the public utility at the Standby Power rating. This rating should be applied where reliable utility power is available. A Standby rated engine should be sized for a maximum of an 80% average load factor and 200 hours of operation per year. This includes less than 25 hours per year at the Standby Power rating. Standby ratings should never be applied except in true emergency power outages. Negotiated power outages contracted with a utility company are not considered an emergency. **PRIME POWER RATING:** Applicable for supplying electric power in lieu of commercially purchased power. Prime Power applications must be in the form of one of the following two categories: **UNLIMITED TIME RUNNING PRIME POWER:** Prime Power is available for an unlimited number of hours per year in a variable load application. Variable load should not exceed a 70% average of the Prime Power rating during any operating period of 250 hours. The total operating time at 100% Prime Power shall not exceed 500 hours per year. A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation. Total operating time at the 10% overload power shall not exceed 25 hours per year. **LIMITED TIME RUNNING PRIME POWER:** Limited Time Prime Power is available for a limited number of hours in a non-variable load application. It is intended for use in situations where power outages are contracted, such as in utility power curtailment. Engines may be operated in parallel to the public utility up to 750 hours per year at power levels never to exceed the Prime Power rating. The customer should be aware, however, that the life of any engine will be reduced by this constant high load operation. Any operation exceeding 750 hours per year at the Prime Power rating should use the Continuous Power rating. **CONTINUOUS POWER RATING:** Applicable for supplying utility power at a constant 100% load for an unlimited number of hours per year. No overload capability is available for this rating.

Reference AEB 10.47 for determining Electrical Output.

Data shown above represent gross engine performance capabilities obtained and corrected in accordance with ISO-3046 conditions of 100 kPa (29.53 in Hg) barometric pressure [110 m (361 ft) altitude], 25 °C (77 °F) air inlet temperature, and relative humidity of 30% with No. 2 diesel or a fuel corresponding to ASTM D2. Derates shown are based on 15 in H₂O air intake restriction and 2 in Hg exhaust back pressure.

The fuel consumption data is based on No. 2 diesel fuel weight at 0.85 kg/liter (7.1 lbs/U.S. gal). Power output curves are based on the engine operating with fuel system, water pump and lubricating oil pump; not included are battery charging alternator, fan, optional equipment and driven components.

Data Status: Limited Production

Data Tolerance: ± 5%

Chief Engineer:

D.K. Trueblood

Cummins Inc.

Engine Data Sheet

ENGINE MODEL : QSX15-G7

CONFIGURATION NUMBER : D103003GX03

DATA SHEET : DS-10440

DATE : 14Jan05

PERFORMANCE CURVE : FR-10440

INSTALLATION DIAGRAM

• Fan to Flywheel : 3170370

CPL NUMBER

• Engine Critical Parts List : 8142

GENERAL ENGINE DATA

Type	4 Cycle; In-line; 6-Cylinder Diesel
Aspiration	Turbocharged and Charge Air Cooled
Bore x Stroke..... — in x in (mm x mm)	5.39 x 6.65 (137 x 169)
Displacement	912 (15)
Compression Ratio.....	17 : 1
Dry Weight..... — lb (kg)	3020 (1370)
Wet Weight..... — lb (kg)	3250 (1475)
Moment of Inertia of Rotating Components	
• with FW 1022 Flywheel	106.7 (4.5)
• with FW 1025 Flywheel	192.0 (8.1)
Center of Gravity from Front Face of Block	19 (483)
Center of Gravity above Crankshaft Centerline.....	10 (255)
Maximum Static Loading at Rear Main Bearing	5400 (2450)

ENGINE MOUNTING

Maximum Bending Moment at Rear Face of Block.....	1500 (2034)
---	-------------

EXHAUST SYSTEM

Maximum Back Pressure at Standby Power Rating.....	3 (76)
Maximum Bending Moment to the Turbo Flange	11 (15)

AIR INDUCTION SYSTEM

Maximum Temperature Rise Between Engine Air Inlet and Intake Manifold	43 (24)
Maximum Intake Air Restriction Including Air Filter Plumbing	
• with Dirty Filter Element.....	25 (635)
• with Clean Filter Element.....	15 (381)
Maximum Allowable Pressure Drop from Turbo Outlet to Intake Manifold.....	4 (102)

COOLING SYSTEM

Coolant Capacity — Engine Only.....	25 (24)
Maximum Coolant Friction Head External to Engine	
— 1800 rpm.....	10 (69)
— 1500 rpm.....	8 (55)
Maximum Static Head of Coolant Above Engine Crank Centerline.....	46 (14)
Standard Thermostat (Modulating) Range	180 - 200 (82 - 93)
Minimum Pressure Cap	10 (70)
Maximum Top Tank Temperature for Standby / Prime Power	230 / 220 (110 / 104)

LUBRICATION SYSTEM

Oil Pressure @ Idle Speed (Minimum).....	20 (138)
@ Pressure Range — Cold.....	Up to 130 (Up to 900)
— Warm	35 - 40 (242 - 276)
Maximum Oil Temperature	250 (121)
Oil Capacity with OP 1493 Oil Pan : High - Low	22 - 19 (83 - 72)
Total System Capacity (Including Filter)	24 (91)
Angularity of OP 1493 Oil Pan — Front Down	5°
— Front Up.....	15°
— Side to Side.....	15°

FUEL SYSTEM

Type Injection System	Cummins HPI-TP
Maximum Restriction at OEM Inlet Connection	— in Hg (mm Hg) 5.0 (127)
Maximum Allowable Head on Injector Return Line (Consisting of Friction Head and Static Head).....	— in Hg (mm Hg) 6.5 (165)
Maximum Fuel Flow to Injection Pump	— US gph (liter / hr) 112 (424)
Maximum Fuel Inlet Temperature	— °F (°C) 160 (71)
Maximum Return Fuel Flow	— US gph (liter / hr) 102 (386)
Maximum Return Fuel Temperature @ 160°F (71°C) Fuel Inlet Temperature	— °F (°C) 210 (99)
Minimum Fuel Tank Vent Capability	— cfm (liter / s) 1.2 (.55)

ELECTRICAL SYSTEM

Cranking Motor (Heavy Duty, Positive Engagement).....	— volt 24
Maximum Allowable Resistance of Cranking Circuit.....	— ohm 0.002
Minimum Recommended Battery Capacity	
• Cold Soak @ 50 °F (10 °C) and Above.....	— °F CCA 600
• Cold Soak @ 32 °F to 50 °F (0 °C to 10 °C).....	— °F CCA 640
• Cold Soak @ 0 °F to 32 °F (-18 °C to 0 °C).....	— °F CCA 900

COLD START CAPABILITY

Minimum Ambient Temperature for Cold Start with Coolant Heater to Rated Speed	— °F (°C) 7 (-14)
Minimum Ambient Temperature for Unaided Cold Start to Low Idle Speed.....	— °F (°C) 25 (-4)
Minimum Ambient Temperature for NFPA 110 Cold Start (90°F minimum coolant temperature).....	— °F (°C) 32 (0)

PERFORMANCE DATA

- All data is based on:
- Engine operating with fuel system, water pump, lubricating oil pump, air cleaner and exhaust silencer; not included are battery charging alternator, fan, and optional driven components.
 - Engine operating with fuel corresponding to grade No. 2-D per ASTM D975.
 - ISO 3046, Part 1, Standard Reference Conditions of:

Barometric Pressure	: 100 kPa (29.53 in Hg)	Air Temperature	: 25 °C (77 °F)
Altitude	: 110 m (361 ft)	Relative Humidity	: 30%

Steady State Stability Band at any Constant Load	— % +/- 0.25%
Estimated Free Field Sound Pressure Level of a Typical Generator Set:	
Excludes Exhaust Noise; at Rated Load and 7.5 m (25 ft); 1800 rpm / 1500 rpm	— dBA 89.0 / 89.5
Exhaust Noise at 1 m Horizontally from Centerline of Exhaust Pipe Outlet Upwards at 45°; 1800 rpm / 1500 rpm	— dBA 125 / 123

Governed Engine Speed	— rpm
Engine Idle Speed.....	— rpm
Gross Engine Power Output.....	— BHP (kW _m)
Brake Mean Effective Pressure	— psi (kPa)
Piston Speed	— ft / min (m / s)
Friction Horsepower	— HP (kW _m)
Engine Water Flow at Stated Friction Head External to Engine:	
• 3 psi Friction Head.....	— US gpm (liter / s)
• Maximum Friction Head.....	— US gpm (liter / s)
Turbo Compressor Outlet Pressure	— psi (kPa)
Turbo Compressor Outlet Temperature	— °F (°C)
Intake Air Flow	— cfm (liter / s)
Exhaust Gas Temperature	— °F (°C)
Exhaust Gas Flow	— cfm (liter / s)
Air-to-Fuel Ratio	— air : fuel
Radiated Heat to Ambient	— BTU / min (kW _m)
Heat Rejection to Coolant.....	— BTU / min (kW _m)
Heat Rejection to Exhaust.....	— BTU / min (kW _m)
Heat Rejection to Fuel *	— BTU / min (kW _m)
Heat Rejection to Aftercooler.....	— BTU / min (kW _m)

STANDBY		PRIME POWER	
60 hz	50 hz	60 hz	50 hz
1800		1800	
675 - 775		675 - 775	
685 (511)		620 (463)	
330 (2275)		298 (2045)	
1995 (10.1)		1995 (10.1)	
70 (52)		70 (52)	
	Not Available at 1500 RPM (50 hz)		Not Available at 1500 RPM (50 hz)
105 (6.6)		105 (6.6)	
87 (5.5)		87 (5.5)	
37.8 (260)		33.4 (230)	
403 (206)		370 (188)	
1390 (656)		1325 (625)	
909 (487)		830 (443)	
3235 (1527)		2930 (1403)	
27.8 : 1		28.2 : 1	
2410 (42)		2850 (50)	
7830 (137)		6760 (119)	
21600 (380)		19200 (338)	
450 (8)		450 (8)	
7300 (128)		5970 (105)	

* Maximum heat rejection which occurs at rated speed, no load.

- N.A.** - Data is Not Available
- NA** - Not Applicable to this Engine
- TBD** - To Be Determined

ENGINE MODEL : QSX15-G7
DATA SHEET : DS-10440
DATE : 14Jan05
CURVE NO. : FR-10440

Cummins Inc.

Columbus, Indiana 47202-3005

• Limited Production •